



## John Deere 6R -serie (TIER 4 FINAL) 6 cilinder MID FRAME


6135 - 6145 - 6155

- Front linkage can be set to a single-acting, double-acting and transport position with the multi-valve supplied as standard
- Includes removable linkage arms with a transport, fixed and oscillation setting
- Front linkage is supplied with a top link, balls and towing hook
- Output shaft can always be rotated over 60 degrees for maximum ease of connection
- PTO clutch engagement time variable to ensure smooth engagement

### Afbeeldingen





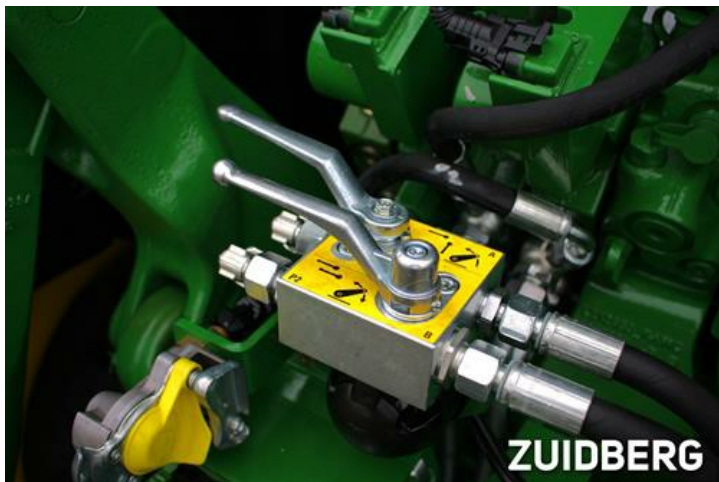

### Front linkage system design

- Can be set to a single-acting, double-acting and transport position with the multi-valve supplied as standard
- Removable linkage arms with a transport, fixed and oscillation setting
- Comes with high quality Walterscheid lifting hooks
- Perfect design due to tractor-specific connections
- Supplied with a top link, balls and towing hook

### Front PTO system design

- Output shaft can always be rotated over 60 degrees for maximum ease of connection
- PTO clutch engagement time variable to ensure smooth engagement
- Non-rotating output shaft in unloaded condition
- Oil immersed clutch plates ensures a long service life
- Supplied with protective cover for PTO stump

### **Additional Info**

- Supplied professional installation manual in 4 languages simplifies installation
- Integrated oil system guarantees rapid PTO installation as it is independent of the tractor's hydraulic system
- PTO includes measuring points for easy locating of faults
- PTO is activated by means of the supplied switch for use inside the cabin