




## New Holland T7 -serie (TIER 4B STANDARD STEER)

7.195S - 7.215S - 7.230 - 7.245 - 7.260 - 7.270

- Front linkage can be set to a single-acting, double-acting and transport position with the multi-valve supplied as standard
- Includes removable linkage arms with a transport, fixed and oscillation setting
- Front linkage is supplied with a top link, balls and towing hook
- Output shaft can always be rotated over 60 degrees for maximum ease of connection
- PTO clutch engagement time variable to ensure smooth engagement

### Afbeeldingen



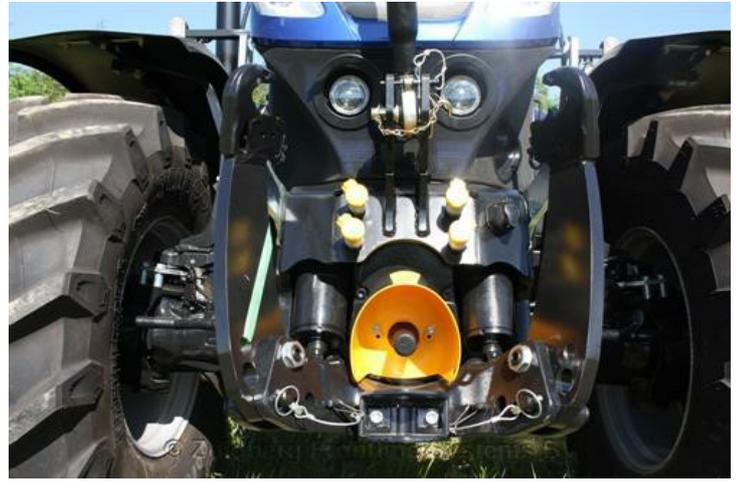



### Front linkage system design

- Front linkage 28 kN without additional support
- Front linkage 50 kN without additional support
- Top plate ready for fitting of front hydraulics, 7-pole connector and chain hooks
- Can also be supplied with side-plate reinforcement
- Can also be supplied with heavy-duty lifting arm set
- Can be set to a single-acting, double-acting and transport position with the multi-valve supplied as standard
- Removable linkage arms with a transport, fixed and oscillation setting
- Comes with high quality Walterscheid lifting hooks
- Perfect design due to tractor-specific connections
- Supplied with a top link, balls and towing hook

### Front PTO system design

- Integrated rev counter in the tractor dashboard
- Comes with an oil cooler as standard
- Output shaft can always be rotated over 60 degrees for maximum ease of connection
- PTO clutch engagement time variable to ensure smooth engagement
- Non-rotating output shaft in unloaded condition
- Oil immersed clutch plates ensures a long service life
- Supplied with protective cover for PTO stump

### Additional Info

#### Front linkage system:

- Front linkage is supplied fully pre-assembled
- Supplied professional installation manual in 4 languages simplifies installation

#### PTO system:

- Easily replaceable V-belt using clamp-on coupling
- Integrated oil system guarantees rapid PTO installation as it is independent of the tractor's hydraulic system
- PTO includes measuring points for easy locating of faults
- PTO is activated by means of the supplied switch for use inside the cabin
- Supplied professional installation manual in 4 languages simplifies installation

#### Other details:

- Can be supplied with two different front control sets. Both a version without height limitation for tractors with electric valves and a version with integrated height limitation for tractors with SideWinder II are available.